

# FSI B28

Brochure

## Self-propelled Stump grinder with 2WD and gasoline engine

FSI B28 is for the serious professional user who carries out stump grinding jobs.

All operations, including travel and stump grinding, are controlled via the integrated control panel. The control panel can be used to engage/disengage the diff lock as well as to adjust the speed of the swing movement. Safety is a top priority, and the safety handle on the control panel must be enabled to start the grinder head.

### Options

**Twin wheels** . Width + 550 mm.

**Tyres with tractor profile.**

**LED work light.**

**Lifting strap with hooks** for crane handling


**Special colour.**

### Capacity by cutting

Time spent for cutting stumps with diameter:

ø400 mm:	8 min.
ø650 mm:	15 min.
ø105 mm:	45 min.

All based on figures from users grinding stumps 15 cm high to 15 cm below ground

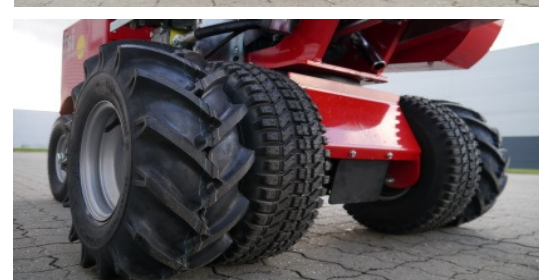

# FSI B28

Tekniske data

## Self-propelled Stump grinder with 2WD and gasoline engine

### Engine

Engine size	20,6 kW/28 hp
Engine type	Subaru EH72 EFI, aircooled
Fuel type	Benzin
Fuel tank	35 liter
Hours per tank	App. 7 hours

### Cutting Head

Cutting disc diameter	470 mm
Tooth system	3 x turnable
Tooth diameter	20,5 mm
No of teeth's	16
Clutch	Electromagnetic with brake
Cutting disc drive	V belt system
Sweep	Hydraulic sweep

### Transmission

Ground drive	2WD hydrostatic with diff. lock
Traction wheels	ø440 x 180, 8 ply
Steering wheels	ø410 x 110
Brakes	Automatic

### Cutting dimensions

Cutting height above ground	800 mm
Cutting depth below ground	380 mm
Cutting sweep width	1350 mm
Sweep speed	Adjustable

### Operator control

Control panel	Adjustable on machine
---------------	-----------------------

### Measurements

Length	2700 mm
Width	800 mm
Height	1160 mm
Weight	600 kg

